Sakura / staff stair barrier

JW-SAK-CHAIN-01 / REV A / MILLIMETRES / CAD PROPOSAL ONLY - UNBUILT

PLAN / existing 1000 x 1000 ground landing

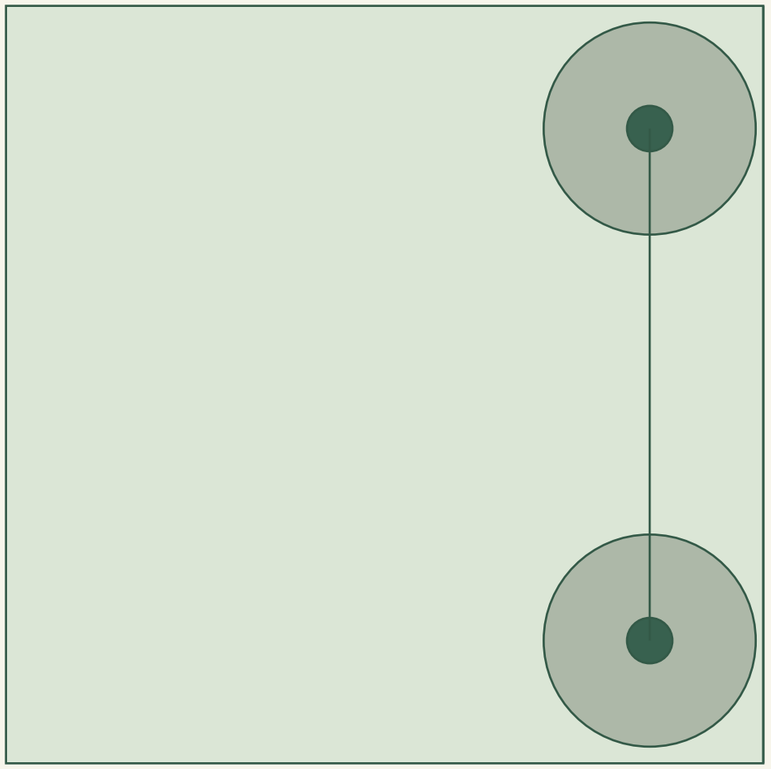

Post X5350; centres D12232 / D12908; span676

Bases diameter280 / posts diameter60 / inset140 from clear edges

Base edge X5490 -> first tread X5500:10 clearance

ELEVATION / looking east

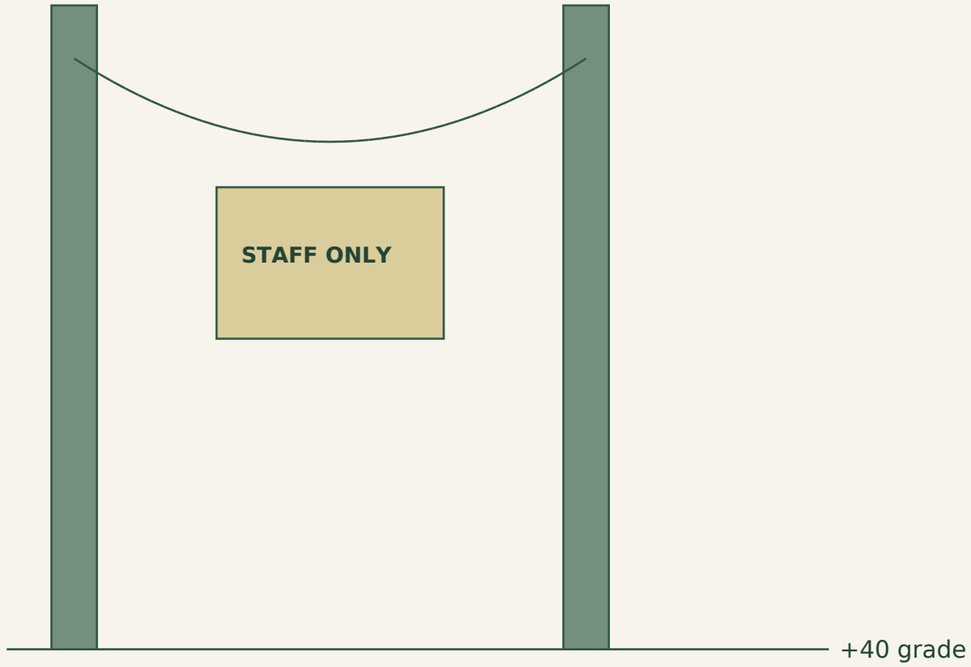

Top +890 / chain ends +820 / low +710 / plate +450-650

Chain diameter12 / sag110; sign300 x200 x4

SELF-AUDIT

Bases remain inside D12092-13048; protected855 outer passage retained.

Both bases fit the ground landing; each base stops10 before the first tread.

The barrier is a scenery proposal, not a usable escape route or a compliance statement.

Before construction: draw release, sign hangers and anchors; verify worker sightlines and grade interface.

Existing non-traversable stair remains unchanged. Written coordinates govern; editable DXF included.